

Fanless Embedded Box PC with Intel® Celeron® Processor N3350/N4200

Front View



Rear View



Features

- Intel® Pentium® N4200 2.5 GHz/ Celeron® N3350 2.4 GHz
- DDR3L 1866 SODIMM x 1, Memory Max. up to 8GB
- COM x 6: RS-232/422/485 x 2 + RS-232 x 4
- USB 3.0 x 4
- VGA + HDMI Output, Support Dual View/Simultaneous Display
- Support 2.5" Drive Bay x 1, mSATA
- Support 8 Channel TTL Level DIO x 1 (Optional)
- AAEON's Hi-Safe Support
- Support DC 9~24V with Power Protection
- Wide Operating Temperature: -20°C ~ 60°C
- AT/ATX Switch, Remote Power On/Off Switch




Specifications

System	
CPU	Intel® Pentium® N4200, 2.5 GHz Intel® Celeron® N3350 2.4 GHz
Chipset	Intel® System on Chip
System memory	DDR3L 1866 SODIMM slot x 1, up to 8GB
Display Interface	HDMI, VGA
Storage Device	mSATA, HDD/SSD
Ethernet	Intel® I211, 10/100/1000Base-TX x 2
I/O	RS-232/422/485 x 2 RS-232 x 4 USB 3.0 x 4 VGA x 1 HDMI x 1 LAN x 2 8-bit DIO x 1 Remote On/Off x 1 Reset Button x 1 AT/ATX DIP Switch Mic-In x 1 Line-Out x 1 Antenna holes x 1 Power button Power input
Expansion	Full-size Mini-Card x 1 (PCIe + USB, w/ SIM slot) Half-size Mini-Card x 1 (A1:PCIe + USB, A2: mSATA + USB)
Indicator	Power LED HDD active LED
OS Support	Windows® 10 Windows® 10 IOT Linux
Power Supply	
Power Requirement	9-24V with 3-pin terminal block
Mechanical	
Mounting	Wallmount DIN Rail (Mounting kit is optional) VESA Mount (Mounting kit is optional)
Dimensions (W x H x D)	197mm(W) x 110mm(D) x 55mm(H)
Gross Weight	6.6 lb (2.8 kg)
Net Weight	4.4 lb (2 kg)
Environmental	
Operating Temperature	-15°C ~ 60°C with W.T. SSD/HDD/mSATA (according to IEC68-2-14 with 0.5 m/s AirFlow ; with industrial devices)
Storage Temperature	-4°F ~ 158°F (-20°C ~ 70°C)
Storage Humidity	95% @ 40°C, non-condensing
Anti-Vibration	3 Grms/ 5 ~ 500Hz/ operation – mSATA/SSD 1 Grms/ 5~ 500Hz/ operation – HDD
Certification	CE/FCC class A

Dimension

Unit: mm

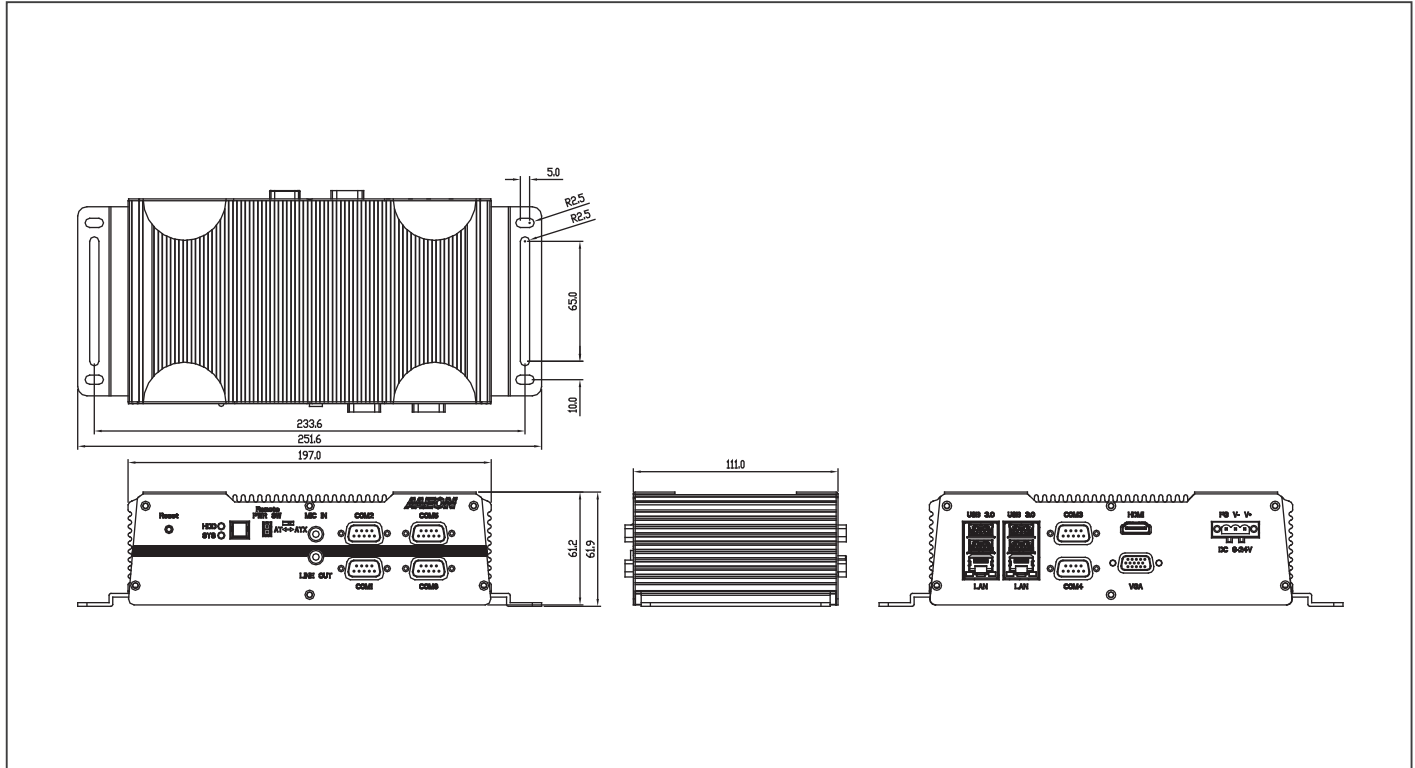

Ordering Information

Part Number	CPU	RAM	LAN	PoE	USB 3.0	USB 2.0	RS-232	RS-232/422/485	Digital I/O	Audio	Storage	Display	Expansion	Mounting	Power	Operation Temp.
BOXER-6616-A1-1010	Intel® Pentium® N4200 2.5 GHz	—	2	—	4	0	4	2	8 Channels	MIC-in x 1 Line-Out x 1	2.5" Drive Bay x 1 Optional mSATA x 1	VGA x 1 HDMI x 1	Full-size Minicard x 1 Half-size Minicard x 1	Wallmount Optional Dinrail Optional VESA-Mount	9~24V DC In	-20°C ~ 60°C
BOXER-6616-A2-1010	Intel® Celeron® N3350 2.4 GHz	—	2	—	4	0	4	2	8 Channels	MIC-in x 1 Line-Out x 1	2.5" Drive Bay x 1 Optional mSATA x 1	VGA x 1 HDMI x 1	Full-size Minicard x 1 Half-size Minicard x 1	Wallmount Optional Dinrail Optional VESA-Mount	9~24V DC In	-20°C ~ 60°C

Packing List

- Wallmount Bracket x 2
- Screw Package x 1
- Product DVD x 1
- Phoenix Power Connector x 1
- BOXER-6616

Optional Accessories

- **1255900841**
Power Adapter
- **1702031802**
Power Cord (US Type)
- **1702031803**
Power Cord (Europe)
- **170203180E**
Power Cord (Japan)
- **9741681003**
Din Rail Mount Kit
- **9751640300**
4G (EU) & GPS Module Kit
- **9751640301**
4G (US) & GPS Module Kit
- **9741C50W04**
WiFi 802.11 b/g/n + BT 3.0 Kit